



NINGBO JIARUI INTELLIGENT TECHNOLOGY CO.,LTD
CIXI JIARUI ELECTRIC APPLIANCE CO., LTD

Add: No. 32, Haiwei Avenue, West Industrial District,
Guanhaiwei Town, Cixi City, Zhejiang Province, China
M.T: 86-13586648886 13958266768
E-mail: ceo@Jiarui.com
<https://www.cxjiarui.com/>



JARUI

Heater

CATALOGUE

NINGBO JIARUI INTELLIGENT TECHNOLOGY CO.,LTD
CIXI JIARUI ELECTRIC APPLIANCE CO., LTD

BRIEF INSTRUCTION

Founded in 2005, Cixi Jiarui Electric Appliance Co., Ltd is a professional manufacturer with research, development, production and marketing which devotes to the development of healthy, safe, innovative and eco-friendly small home electronic appliances. The main products are convectors, outdoor heaters, radiation heaters, fan heaters, PTC heaters and so on.

Our factory has 5-100 tons punching machines, 100-315 tons hydraulic tensile equipments, 200-2500g injection machines and production lines, with a complete and scientific quality management system.

Jiarui has been established for 20 years, as a professional manufacturer, our company has ISO9001, BSCI, GS, EMC, CE, CB, RoHs, Erp. for Europe market.

Our company has a strong R&D design team and has establish quality assurance system, we are striving to become the top brand enterprise in the field of small Household electric appliance.



JIARUI





ZCH01 Timer



ZCH01 Timer/Turbo

ZCH01 Turbo

ZCH01

- Volts: 220-240V~ 50-60Hz 1800-2000W
- Power: 3heating powers 750/1250W/2000W
- Power: 2heating powers (turbo) 1250W/2000W
- Internal heat limiting thermostat
- Adjustable thermostat control Indicator light
- Heating element: heating wire
- ZCH01 Turbo: fan assisted more uniform heating
- ZCH01 Timer: Take 24 hours timer
- ZCH01 Timer/Turbo: The timer/Turbo

Model	Carton size(mm)	MODEL NO	G.W./N.W.(KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
ZCH01	630x140x425	ZCH01	3.0/2.4	625x260x385	850	1530	1800
		ZCH01 Turbo	3.35/2.8				
		ZCH01 Timer	3.05/2.45				
		ZCH01 Timer/Turbo	3.45/2.85				

Convection Heater



ZCH02 Timer



ZCH02

- Volts; 220-240V~ 50-60Hz 1800-2000W
- Power: 3heating powers 750/1250W/2000W
- Over heating protection
- Adjustable thermostat control
- Heating wire element
- With carry handle
- Free standing

GS CE LVD EMC RoHS CB ERP REACH

Model	Carton size(mm)	MODEL NO	G.W./N.W.(KGS)	Product size:(mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
ZCH02S	560x138x335	ZCH02	2.4/1.85	525x200x340	1120	2340	2600
		ZCH02 Timer	2.45/1.9				

Convection Heater



ZCH04

ZCH04 Timer

- Volts; 220-240V~ 50-60Hz 1800-2000W
- Power: 3heating powers 750/1250W/2000W
- Power: 2heating powers (turbo) 1250W/2000W
- Over heating protection
- Adjustable thermostat control
- heating wire element
- With carry handle
- Free standing
- ZCH04 Turbo: fan assisted more uniform heating
- ZCH04 Timer: Take 24 hours timer
- ZCH04 Timer/Turbo: The timer/Turbo

GS CE LVD EMC RoHS CB ERP REACH

Model	Carton size(mm)	MODEL NO	G.W./N.W.(KGS)	Product size:(mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
ZCH04	710x140x475	ZCH04	4.7/3.9	660x200x450	612	1310	1530
		ZCH04 Turbo	5.0/4.2				
		ZCH04 Timer	4.8/4.0				
		ZCH04 Timer/Turbo	5.1/4.3				



ZCH06 ZCH06 Turbo



ZCH06 Timer ZCH06 Timer/Turbo

- Volts; 220-240V~ 50-60Hz 1800-2000W
- Power: 3heating powers 750/1250W/2000W
- Power: 2heating powers (turbo) 1250W/2000W
- Internal heat limiting thermostat
- Adjustable thermostat control Indicator light
- Heating element: heating wire
- ZCH06 Turbo: fan assisted more uniform heating
- ZCH06 timer: Take 24 hours timer
- ZCH06 timer/Turbo: The timer/Turbo

GS CE LVD EMC RoHS CB ERP REACH

Model	Carton size(mm)	MODEL NO	G.W./N.W.(KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
ZCH06	598x135x397	ZCH06	3.1/2.4	560x230x385	850	1820	2120
		ZCH06 Turbo	3.35/2.8				
		ZCH06 Timer	3.2/2.5				
		ZCH06 Timer/Turbo	3.4/2.85				



JR02 JR02 Timer/Turbo JR08 JR08 Timer/Turbo

- Volts;220-240V~ 50-60Hz 1800-2000W
- Power: 3heating powers 750/1250W/2000W
- Power: 2heating powers (turbo) 1250W/2000W
- Internal heat limiting thermostat
- Adjustable thermostat control Indicator light
- Heating element: heating wire
- JR02 Turbo: fan assisted more uniform heating
- JR02 Timer : Take 24 hours timer
- JR02 Timer/Turbo: The timer/Turbo

- Volts;220-240V~ 50-60Hz 1800-2000W
- Power: 3heating powers 750/1250W/2000W
- Power: 2heating powers (turbo) 1250W/2000W
- Internal heat limiting thermostat
- Adjustable thermostat control Indicator light
- Heating element: heating wire
- JR08 Turbo: fan assisted more uniform heating
- JR08 Timer : Take 24 hours timer
- JR08 Timer/Turbo: The timer/Turbo

GS CE UKCA LVD EMC RoHS CB ERP REACH

Model	Carton size(mm)	MODEL NO	G.W./N.W.(KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
JR02	560x138x335	JR02	2.4/1.9	545x198x325	1120	2340	2600
		JR02 Turbo	2.8/2.3				
		JR02 Timer	2.6/2.0				
		JR02 Timer/Turbo	2.8/2.2				
JR08	655x140x425	JR08	2.9/2.3	625x260x385	750	1400	1690
		JR08 Turbo	3.25/2.7				
		JR08 Timer	2.95/2.35				
		JR08 Timer/Turbo	3.35/2.7				

Convection Heater



DLS

DLSS

- Volts; 220-240V~ 50-60Hz 450W
- 1 heat settings:450W
- Over heating protection
- Adjustable thermostat control
- Aluminium element optional
- Free standing

GS CE LVD EMC RoHS

Model	Color box size(mm)	Carton size(mm)	G.W./N.W.(KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
DLS DLSS	290x120x260	375x305x540 (6PCS/CTN)	1.1/0.9	290x125x270	2800	6000	6800

Convection Heater



- DL01SS**
- Volts; 220-240V~ 50-60Hz 1500W
 - Power: 2heating powers 750/1500W
 - Internal heat limiting thermostat
 - Adjustable thermostat
 - Overheat protection
 - Adjustable thermostat control
 - Heating wire element
 - With carry handle
 - Freestanding
 - With turbo/timer



- DL01S Timer/Turbo**
- Volts; 220-240V~ 50-60Hz 1800-2000W
 - Power: 3heating powers 750/1250W/2000W
 - Over heating protection
 - Adjustable thermostat control
 - Heating wire element
 - With carry handle
 - Free standing
 - With Timer & turbo



- DL01**
- Volts: 220-240V~ 50Hz 1800-2000W
 - Power: 3heating powers 750/1250W/2000W
 - Over heating protection
 - Adjustable thermostat control
 - Heating wire element
 - With carry handle
 - Free standing
 - With Timer & turbo

GS CE LVD EMC RoHS CB ERP REACH

Model	Carton size(mm)	MODEL NO	G.W./N.W.(KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
DL01SS	547x132x325	DL01SS Timer/Turbo	2.75/2.2	515x170x325	1100	2290	2720
DL01S	575x133x395	DL01S Timer/Turbo	3.0/2.4	535x198x380	950	1920	2270
DL01	625x140x440	DL01 Timer/Turbo	3.15/2.75	580x198x420	780	1600	1280



- Volts;220-240V~ 50-60Hz 1800-2000W
- Power : 3heating powers 800/1200W/2000W With electronic screen
- Internal heat limiting thermostat
- Adjustable thermostat control Indicator light
- Heating element: heating wire
- JR06R Turbo: fan assisted more uniform heating
- JR06W Turbo/Wifir: Turbo/Wifi

Model	Carton size(mm)	MODEL NO	G.W./N.W.(KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
JR06R	598x135x397	JR06R	3.25/2.7	560x230x385	850	1820	2120
		JR06R Turbo	3.35/2.8				
		JR06W Turbo	3.35/2.8				



JR08R Turbo JR08W Turbo



JR09R Turbo JR09W Turbo

- Volts;220-240V~ 50-60Hz 1800-2000W
- Power: 3heating powers 800/1200W/2000W With electronic screen
- Internal heat limiting thermostat
- Adjustable thermostat control Indicator light
- Heating element: heating wire
- JR08R Turbo: fan assisted more uniform heating
- JR08W Turbo/Wifi: Turbo/Wifi

- Volts;220-240V~ 50-60Hz 2000-2300W
- Power: 3heating powers 1000/1300W/2300W With electronic screen
- Internal heat limiting thermostat
- Adjustable thermostat control Indicator light
- Heating element: heating wire
- JR09R Turbo: fan assisted more uniform heating
- JR09W Turbo/Wifi: Turbo/Wifi

Model	Carton size(mm)	MODEL NO	G.W./N.W.(KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
JR08R	655x140x425	JR08R	3.25/2.7	620x260x385	750	1400	1690
		JR08R Turbo	3.35/2.8				
		JR08W Turbo	3.35/2.8				
JR09R	730x155x450	JR09R	3.6/2.8	685x220x435	585	1150	1335
		JR09R turbo	4.0/3.2				
		JR09W turbo	4.0/3.2				

Convection Heater



PN-2000

- 220-240V 50Hz VDE Plug
- 2 heating powers:1200W/2000W
- Adjustable thermostat
- Overheat protection
- Freestanding
- Heating element: heating wire
- 2 heating powers:1000W/2000W
- Heating element: Aluminum element



PN-1000

- 220-240V~ 50Hz VDE Plug
- 2 heating powers: 1000W
- Adjustable thermostat
- Overheat protection
- Freestanding
- Heating element: heating wire
- 2 heating powers: 500W/1000W
- Heating element: Aluminum element



PN-1500

- 220-240V 50Hz VDE Plug
- 2 heating powers: 900W/1500W
- Adjustable thermostat
- Overheat protection
- Freestanding
- Heating element: heating wire
- 2 heating powers: 750W/1500W
- Heating element: Aluminum element



MODEL NO	Product dimension (mm)	Package dimension (mm)	G.W./N.W.(KGS)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
PN-1000	470x270x500	520x125x500	3.4/3.25 - 3.65/2.8	850	1820	2120
PN-1500	615x270x500	670x125x500	4.1/3.15 - 4.6/3.6	650	1200	1700
PN-2000	780x270x500	825x125x500	4.4/3.45 - 5.4/4.2	550	1100	1400

Patio Heater



ZQH01-2000W



ZQH03-1200S/ZQH03-1500S



ZQH04-1200S/ZQH04-1500S


- Volts:220-240V 60Hz 2000W
- 3 Heating power:650/1300/2000W
- Pull chain control
- Heating element:Quartz
- Head angle adjust about 0-45 degree
- Height adjust about 1.75-2.1M
- With tip-over switch(for ZQH01-2000S)
- IP34 waterproof
- Freestanding or wall mounted



ZQH01-2000S

Model	Carton size(mm)	MODEL NO	G.W./N.W.(KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
ZQH01	530x210x530	ZQH01-2000S	8.6/7.5	500x500x2100	492	1020	1160
Series	530x240x270	ZQH01-2000W	2.2/1.6	500x160x360	815	1688	1979

Quartz Heater

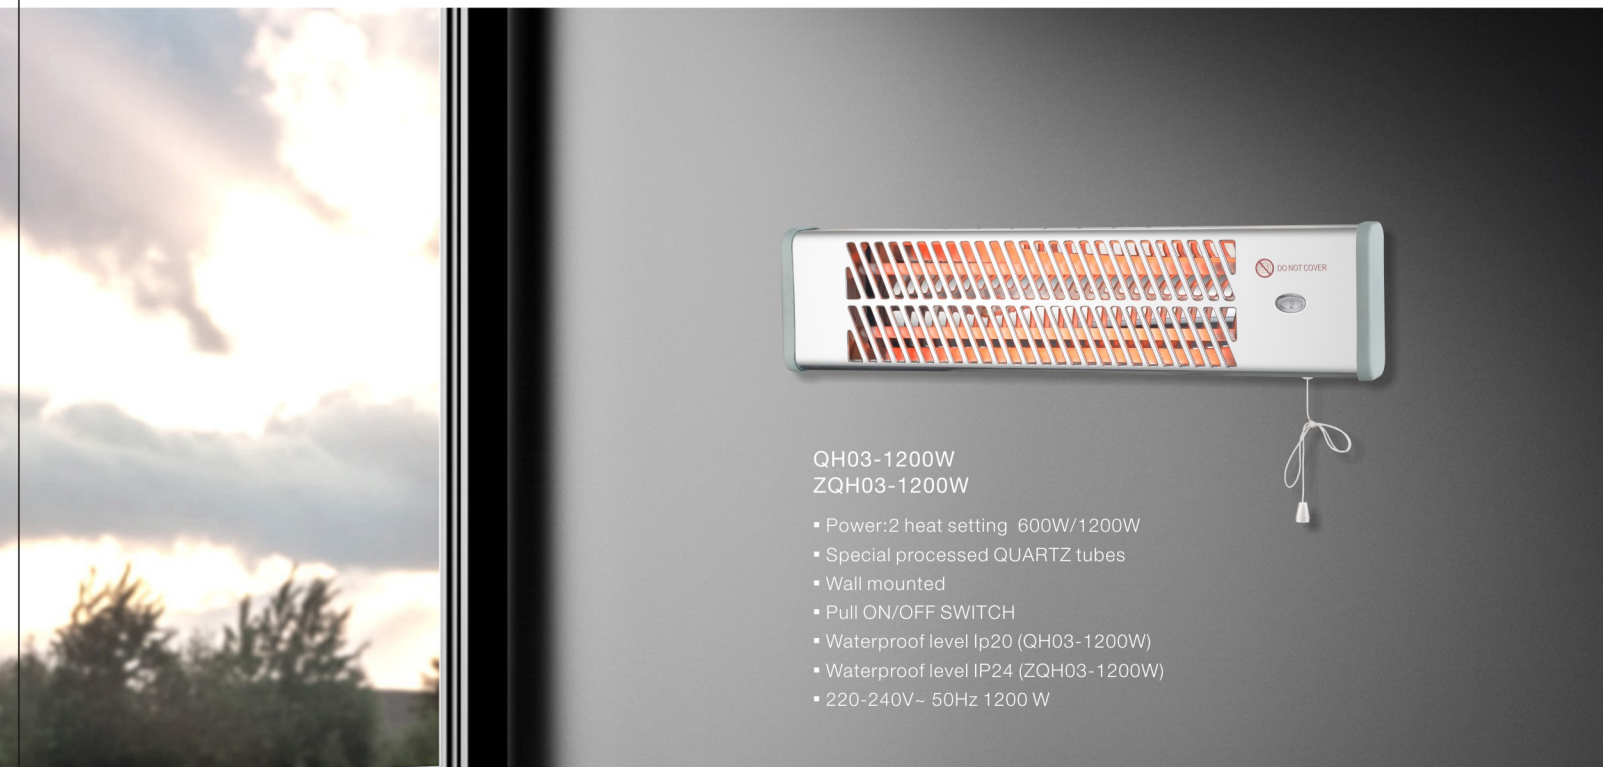

QH03-1200W
ZQH03-1200W

- Power: 2 heat setting 600W/1200W
- Special processed QUARTZ tubes
- Wall mounted
- Pull ON/OFF SWITCH
- Waterproof level Ip20 (QH03-1200W)
- Waterproof level IP24 (ZQH03-1200W)
- 220-240V~ 50Hz 1200 W




QH04-1200W
ZQH04-1200W

- Power: 2 heat setting 600W/1200W
- Wall mounted
- PUI ON/OFF SWITCH
- 220-240V~50-60Hz1200 W

QH04-1500W
ZQH04-1500W

- Power: 3 heat setting 500W/1000W/1500W
- Wall mounted
- PUI ON/OFF SWITCH
- 220-240V~50-60Hz1200 W

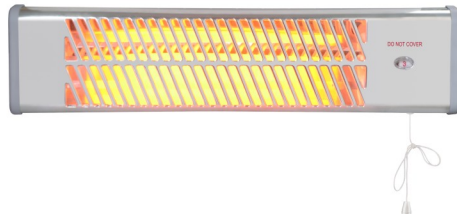

QH03-1500W
ZQH03-1500W

- Power: 3 heat setting/500W/1000W/1500W
- Special processed QUARTZ tubes
- Wall mounted
- Pull ON/OFF SWITCH
- Waterproof level IP20 (QH03-1500W)
- Waterproof level IP24 (ZQH03-1500W)
- 220-240V~ 50Hz 1500 W





Model	Color box size (mm)	Carton size(mm)	G.W./N.W.(KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
QH03-1200W	565x160x135	580x335x420 /6PCS	1.4/1.1	535x130x115	1830	4020	4800
ZQH03-1200W							
QH03-1500W			1.5/1.3				
ZQH03-1500W							
QH04-1200W	585x135x185	605x420x390 /6PCS	1.7/1.5	555x155x120	1750	3950	4400
ZQH04-1200W							
QH04-1500W			1.8/1.6				
ZQH04-1500W							

Radiation Heater



BY1201

- AC 120V/60Hz, 1500W
- 2 heat settings 1250W/1500W
- Safety overheating protection
- The use of heating wire heating.
- Adjust the heating temperature by temperature control twisting.
- Use fans to accelerate air convection.
- Tilt protection.



PH01-1000-1000W
PH01-1500-1500W
PH01-2000-2000W

- ON/OFF switch with remote control
- Three step control "HIGH" "MEDIUM" "LOW"
- Saving more than 70% cost compared with gas heater
- Almost unlimited fields of application :Indoor and outdoor
- Highest Weather Proof rating for a heater: Ip65
- Gold coated lamp (HeLeN), no UV, safety use
- 220-240V 50Hz

MODEL NO	Rated power	Color box size (mm)	Carton size (6pcs/ctn)	G.W./N.W. (KGS)	Product size: (mm)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
BY1201	1500W	485x150x285	/	2.5/2.2	410x180x300	1400	2800	3200
PH01-1000	1000W	515x140x140	530x295x435	1.73/1.96	480x100x130	2496	5280	6000
PH01-1500	1500W	585x140x140	600x295x435	1.85/2.12	550x100x130	2304	4650	5370
PH01-2000	2000W	665x140x140	680x295x435	2.0/2.3	630x100x130	1900	3870	4380



PTC Fan Heater



PTC1200A
PTC1200AR

- 220-240V~50-60Hz 1200W
- 2 heat settings:600/1200W
- PTC Ceramic heating element
- Cool/warm/hot wind for selection
- Overheat protection
- Safety thermal cut-out
- Oscillation
- Option: Electronic model and remotrol control upcost(+usd)



PTC1200B
PTC1200BR

- 220-240V~50-60Hz 1200W
- 2 heat settings:600/1200W
- PTC Ceramic heating element
- Cool/warm/hot wind for selection
- Overheat protection
- Safety thermal cut-out
- Oscillation
- Option: Electronic model and remotrol control upcost(+usd)



PTC1200C
PTC1200CR

- 220-240V~50-60Hz 1200W
- 2 heat settings:600/1200W
- PTC Ceramic heating element
- Cool/warm/hot wind for selection
- Overheat protection
- Safety thermal cut-out
- Oscillation
- Option: Electronic model and remotrol control upcost(+usd)

GS CE LVD EMC RoHS CB ERP REACH

MODEL NO	Giftbox size(mm)	Carton box size (mm)	G.W./N.W.(KGS)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
PTC1200A/PTC1200AR	190x190x324	390x390x675/8PCS	1.35/1.15	2240	4640	5360
PTC1200B/PTC1200BR	190x190x315	390x390x655/8PCS	1.38/1.18	2240	4640	5360
PTC1200C/PTC1200CR	190x190x315	390x390x655/8PCS	1.39/1.19	2240	4640	5360

Quartz Heater



RH04

- 2 heating powers:400W/800W
- Safety tip-over switch
- Detachable feet design for more loading quantity
- Smart design,easy to move



RH06

- 2 heating powers:400W/800W
- Safety tip-over switch
- Folded when storage
- Smart design,easy to move

GS CE LVD EMC RoHS CB ERP REACH

MODEL NO	Giftbox size(mm)	Qty/Carton	G.W./N.W.(KGS)	20'FT(PCS)	40'FT(PCS)	40'HQ(PCS)
Rh04	300x105x360	8PCS	1.0/1.1	2320	4720	5600
RH06	268x90x375	10PCS	1.0/1.1	3000	6200	7000

Fan Heater



FH-A01

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Automatic control temperature
- Overheat protection
- Power indicator light
- Anti-fire body
- 100% Copper motor



FH-A02

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Automatic control temperature
- Overheat protection
- Power indicator light
- Anti-fire body
- 100% Copper motor



FH-A11

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Automatic control temperature
- Overheat protection
- Power indicator light
- Anti-fire body
- 100% Copper motor

GS CE LVD EMC RoHS CB ERP REACH

MODEL NO	Giftbox size(mm)	Qty/Carton	G.W./N.W.(KGS)	20'FT(PCS)	40'FT(PCS)	40'HQ(PCS)
FH-A01	225x135x265	8PCS	1.0/1.1	3080	6200	7800
FH-A02	230x140x270	8PCS	1.0/1.1	3080	6200	7200
FH-A11	250x125x245	8PCS	1.0/1.1	3280	6928	8080

Fan Heater



FH-A07

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Automatic control temperature
- Overheat protection
- Power indicator light
- Anti-fire body
- 100% Copper motor



FH-A08

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Automatic control temperature
- Overheat protection
- Power indicator light
- Anti-fire body
- 100% Copper motor



FH-A18

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Automatic control temperature
- Overheat protection
- Power indicator light
- Anti-fire body
- 100% Copper motor



FH-A19

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Automatic control temperature
- Overheat protection
- Power indicator light
- Anti-fire body
- 100% Copper motor



FH-A20

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Automatic control temperature
- Overheat protection
- Power indicator light
- Anti-fire body
- 100% Copper motor



FH-A21

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Automatic control temperature
- Overheat protection
- Power indicator light
- Anti-fire body
- 100% Copper motor

GS CE LVD EMC RoHS CB ERP REACH

MODEL NO	Giftbox size(mm)	Carton Size(mm)	G.W./N.W.(KGS)	20'FT(PCS)	40'FT(PCS)	40'HQ(PCS)
FH-A07	220x130x262	405x230x550	8.5/7.8	3080	6200	7800
FH-A08	198x140x231	430x210x470	8.5/7.8	3720	7908	9300
FH-A18	220x175x275	535x230x565	9.6/8.0	2400	4920	5880
FH-A19	230x195x300	600x240x615	9.8/8.8	1920	3840	4560
FH-A20	220x175x275	565x235x480	8.5/7.8	4100	8500	10000
FH-A21	195x135x250	563x203x515	9.1/8.5	3704	7760	9040

Workshop Heater



JR-15

- 2 heating powers:750W/1500W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Overheat protection
- Anti-fire body



JR-20

- 2 heating powers:1000W/2000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Overheat protection
- Anti-fire body



JR-30

- 2 heating powers:1500W/3000W
- Cool/Warm/Hot wind for selection
- Adjustable room thermostat
- Overheat protection
- Anti-fire body

GS CE LVD EMC RoHS CB ERP REACH

MODEL	Product Size(mm)	Giftbox size(mm)	Carton box size (mm)	G.W./N.W.(KGS)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
JR-15	185x155x230	190x158x240	570x316x250/6PCS	7.2/6.0	3810	8064	9216
JR-20	230x190x300	235x210x310	705x420x320/6PCS	9.0/6.6	1764	3570	4284
JR-30	230x190x300	235x210x310	705x420x320/6PCS	10.2/7.8	1764	3570	4284



- LF-03 / LF-03R**
- 220-240V~ 50-60Hz 40W
 - Water curtain humidifying function, combined with ice crystals can quickly cool down
 - Left and right wind-sweeping function, increasing the area of air supply
 - Wind speed up to 5.0m/s
 - 8-liter ultra-large water tank capacity
 - LF-03R: Super long timer 15 hours setting



LF-01/LF-01R & LF-02/LF-02R

- 220-240V~ 50-60Hz 75W
- Water curtain humidifying function, combined with ice crystals can quickly cool down
- Left and right wind-sweeping function, increasing the area of air supply
- LF-01/LF-01R: wind speed up to 6.5m/s
- LF-01/LF-01R: 4-liter ultra-large water tank capacity
- LF-02/LF-02R: wind speed up to 8.0m/s
- LF-02/LF-02R: 7-liter ultra-large water tank capacity
- LF-01R/LF-02R: Super long timer 12 hours setting



LF-04/LF-04R & LF-05/LF-05R

- 220-240V~ 50-60Hz 75W
- Water curtain humidifying function, combined with ice crystals can quickly cool down
- Left and right wind-sweeping function, increasing the area of air supply
- LF-04/LF-04R: wind speed up to 6.5m/s
- LF-04/LF-04R: 4-liter ultra-large water tank capacity
- LF-05/LF-05R: wind speed up to 8.0m/s
- LF-05/LF-05R: 7-liter ultra-large water tank capacity
- LF-04R/LF-05R: Super long timer 12 hours setting



MODEL	Product Size(mm)	Carton box size (mm)	G.W./N.W.(KGS)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
LF-01/LF-01R	245x215x610	285x260x625	4.6/3.9	604	1252	1468
LF-02/LF-02R	296x258x755	335x295x805	6.0/5.2	354	630	854
LF-03/LF-03R	236x236x610	275x275x660	4.1/3.3	576	1152	1376
LF-04/LF-04R	245x215x610	285x260x625	4.6/3.9	604	1252	1468
LF-05/LF-05R	296x258x755	335x295x805	6.0/5.2	354	630	854



- F06**
- Upgraded 5000mAh Battery 955465
 - USB Fast Charging & Battery Charging
 - 3 Speeds adjustable
 - Head pivots 360° vertically and horizontally
 - Strong Flexible legs for multiple



CF005

- Rechargeable Fan with USB cord
- 5V DC/3W
- Soft push button
- Stepless fan speed settings
- 2000mAh battery/USB
- Adjustable air-out angle



F19

- Rechargeable Fan with USB cord
- 3 fan speed
- 1200mAh battery
- Input voltage: 5V
- Output power: 3W
- With phone stand



MODEL	Product Size(mm)	Giftbox size(mm)	Carton box size (mm)	G.W./N.W.(KGS)	20'FT (PCS)	40'FT (PCS)	40'HQ (PCS)
F06	150x68x323	132x72x210	/	/	12000	24840	29130
CF005	140x115x185	160x100x195	1015x335x410/40PCS	0.37/0.28	7840	16240	18560
F19	105x105x210	109x43x205	445x233x430/40PCS	0.22/0.19	26000	54000	64800